





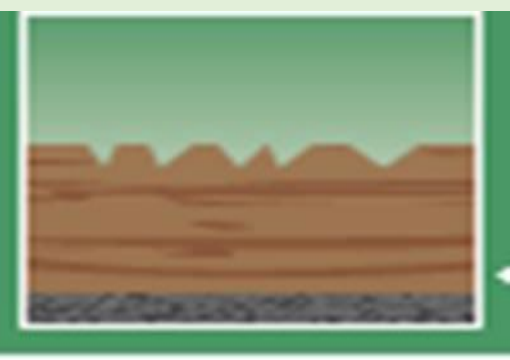
02 9337 6800

NASH
TIMBERS



Eukula Oil Based Systems

The Chemical reaction of lyes is specific to the type of wood and the substances it contains.

 <p>euku classic lye</p>	<p>Lye Classic Scandinavian pre-treatment of Coniferous woods before oiling. Coniferous woods before oiling.</p> <ul style="list-style-type: none">✓ deep honey-tone with accentuation of the heartwood✓ reduces photo-ageing✓ easy to apply✓ free of solvents
 <p>euku oak antique</p>	<p>Lye for woods containing tannic acid Pre-treatment before oiling in order to achieve an antique effect.</p> <ul style="list-style-type: none">✓ intensification of the colour tone of oak✓ even effect✓ free of solvents
 <p>euku oak iron</p>	<p>Lye for woods containing tannic acid Pre-treatment before oiling in order to blacken the tannic acid.</p> <ul style="list-style-type: none">✓ colour effect similar to smoky✓ easy to apply✓ free of solvents