




TALLOWOOD SCREENING



**NASH**  
TIMBERS

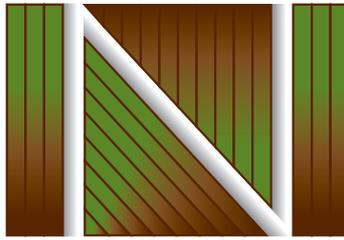

TALLOWOOD CLADDING

## EXTERNAL CLADDING, SCREENING & DECKING

### TIMBER CLADDING EXTERNAL AND INTERNAL

Timber clad buildings can be designed to suit any environment and fit any site with a minimum of expense. The possibilities are almost limitless. They can look traditional, modern or simply unique-designed to suit the style, flair and imagination of the owner. Modern finishes give a long lasting and attractive Timber cladding on walls should finish clear of the ground in such a way that there is no possibility that moisture uptake may occur and may eventually cause deterioration of the cladding near the ground. Flashing may be installed to protect the bottom cladding board from moisture ingress.

External Cladding use Tallowood, Spotted Gum or Ironbark, cover ranges from 60mm to 160mm

### TIMBER SCREENING

External Timber screening can be used in Tallowood, Spotted Gum, or Ironbark profiles available, Rough Sawn, Square Dressed or Pencil Round sizes starting from 20mm x 20mm to what ever your heart desires.

### DECKING

Does all decking go grey? Yes Ultra violet sucks out the colour from the timber. Red colour timber will be sucked quicker i.e Merbau and Red Ironbark decking than from Tallowood, Spotted Gum or Blackbutt Decking.

To retain natural colour a clear ultraviolet timber protection has to be applied every 6 months. Untreated Decking starts to grey off from 6 months.


Decking bleeds because the timber cell structure is protecting itself by throwing out sap, the timber cells believe that they are still alive. A timber water repellent product can be applied which will slow the process.

If the timber is untreated sap will be excreted up till 6 to 9 months, increased when the timber gets wet.


Oxalic Acid (derivative from the root of a spinach plant) can be used to remove sap from tiles or cement.

Apply a decking oil to decking every 12 months to maintain integrity of the timber.

Decking width sizes, 64 86, 88, 135, Height 19mm to 35mm

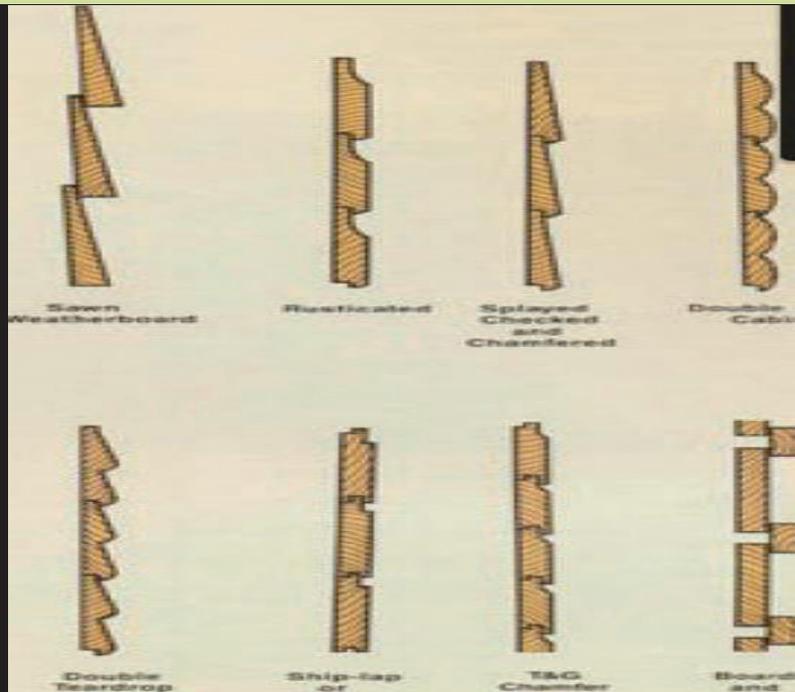

SHIPLAP PROFILES

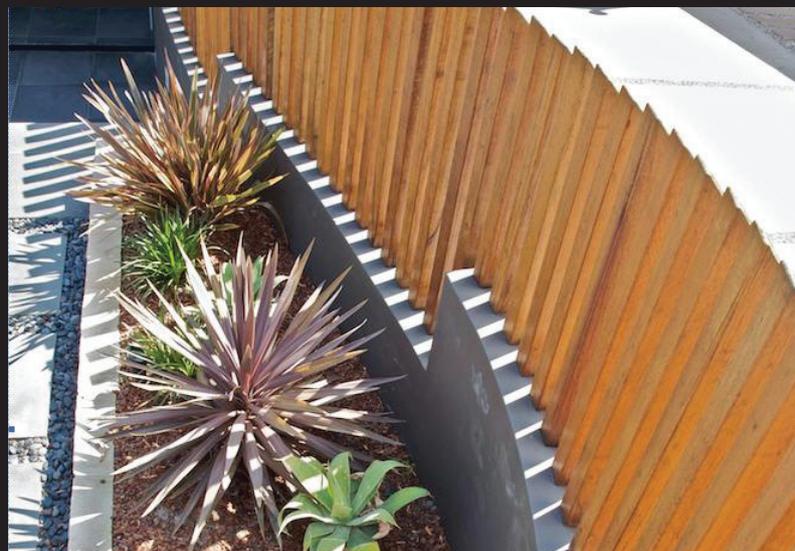

TALLOWOOD FENCE

(02) 9337 6800/ [info@nashtimbers.com.au](mailto:info@nashtimbers.com.au)/ [nashtimbers.com.au](http://nashtimbers.com.au)

Showrooms → By appointment only