




Select Grade Tasmanian Oak Flooring



**NASH**  
TIMBERS

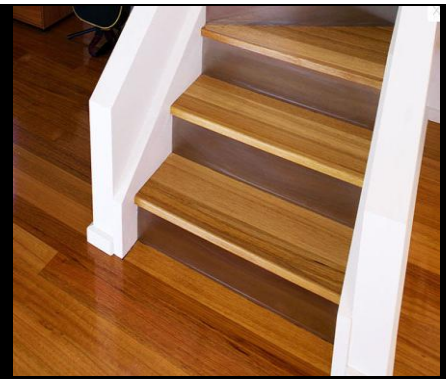

Tasmanian Oak Select grade Flooring

## TASMANIAN OAK

### TASMANIAN OAK.

**COLOUR-** Straw to light reddish brown.

**WIDTH-** 80mm to 130mm

**GRAIN –** Straight, open & even

**GUM VEIN–** Frequent

**FIGURE -** Interlocking

**TEXTURE-** Uniform & smooth

**HARDNESS (JANKA RATING)-** 5.5

**DURABILITY –** Class 4

**APPLICATION –** Flooring, staircase



TASMANIAN OAK FLOORING

**ASK ABOUT OUR UNIQUE**



Species	Visible Gum Vein	Colour Variation	Janka Hardness	Durability	Board Width	Fire Retardant
North Coast Blackbutt	More frequent	Cream to honey brown	9.1	2	80mm to 220mm	Best
Coastal Spotted Gum	Frequent	Light brown to brown	11.0	2	80mm to 210mm	Best
Red Ironbark	Rare	Light Red to red brown	14.0	1	80mm to 180mm	Best
Grey Ironbark	Rare	Pale brown to dark red, variable	14.0	1	80mm to 180mm	Best
Grey Box	Rare	White to light brown(mid brown)	15.0	1	80mm to 180mm	Best
Jarra	Frequent	Rich dark red brown	8.5	2	80mm to 130mm	No
Sydney Blue Gum	More Frequent	Pink to pink brown	9.0	3	80mm to 130mm	No
American White Oak	Never	Light brown with pinkish to grey	6.0	3	80mm to 220mm	Poor
Tallowood	Never	Pale straw to dark brown	8.6	1	60mm to 210mm	N/A
Brushbox	Rare	Pink to brown sapwood present	9.1	3	80mm to 180mm	N/A
Grey Gum	Rare	Red to red brown	1	1	80mm to 180mm	Best
Tasmanian Oak	Frequent	Pale blonde to brown	5.5	4	80 mm to 133mm	Poor
Plantation Hardwood	Frequent	Rose and blonde	8.0	2	80mm to 103mm	N/A

(02) 9337 6800 /info@nashtimbers.com.au/nashtimbers.com.au